


DX200B INSTALLATION AND PROGRAMMING

WIRING

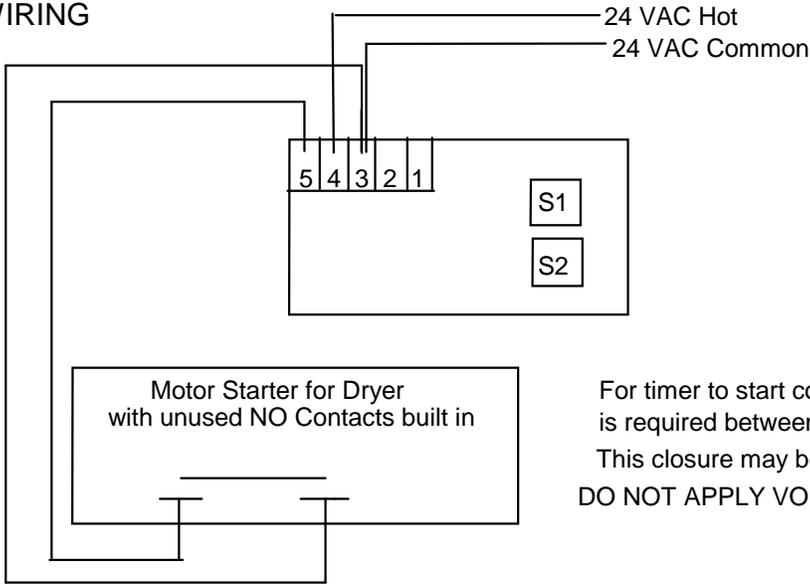


Wiring Connections


- 1 No Connection
- 2 No Connection
- 3 Timer Start and 24 VAC Common
- 4 24 VAC Hot
- 5 Timer Start

For timer to start counting, a dry contact closure is required between terminals 3 and 5.
 This closure may be either momentary or constant.
DO NOT APPLY VOLTAGE TO TERMINAL 3 OR 5

Other timer start connections

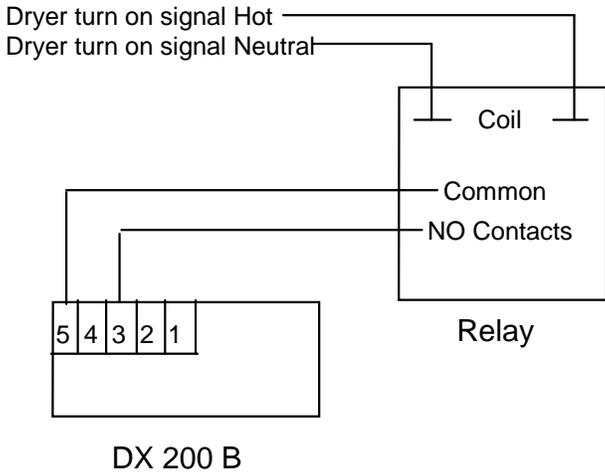

24 Volts Applied when Dryer starts

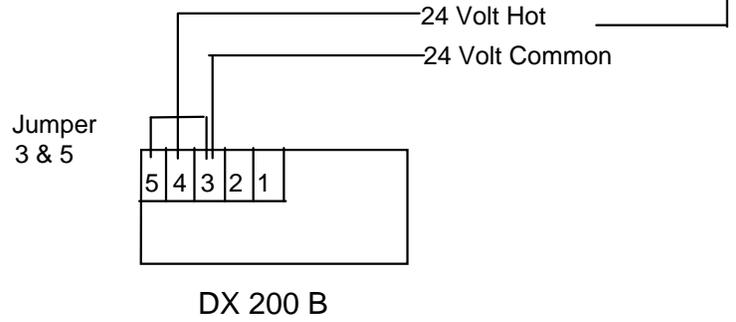

Timer will be dark when not in use.
 When Dryer starts timer will light up and start counting down.

PROGRAMMING

Digits are individually set as follows:

S1 Adjusts seconds individually (right digit)

S2 Adjusts seconds by 10's (left digit)

Example: To set display to show 90 seconds: Set S2 to '9' Set S1 to '0'

DIXMOR ENTERPRISES
 5755 S. GALLUP ST
 LITTLETON CO 80120
 303-794-0597